


# 3D SS Composer

**3D SS Composer** is the convertor to display the HD-SDI 3-dimension picture composed by 2-screen compression system to a full HD Xpol™ display.

**2-screen compression system:** L channel picture and R channel picture are stored with independent compression to one HD picture.

**Applicable HD-SDI format is 4:2:2 of 1080 60i and 1080 59.94i (automatic detection), and 1080 60p (59.94p) is output to DVI-D display.**

## 1. Connection with DVI-D display (Connection with HDMI Display)

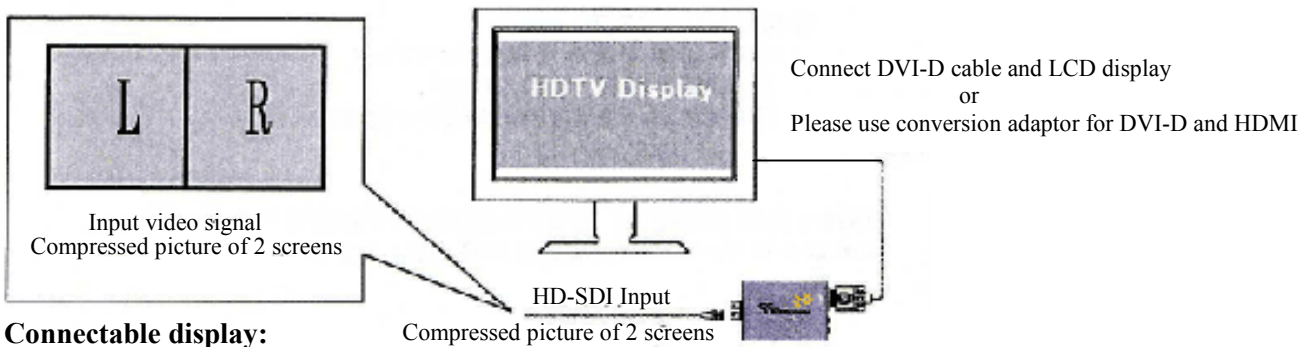

### Connectable display:

The display that 1920x1080 can be displayed.

(ex: 1920x1080 1920x1200) Refresh rate: 60Hz (59.94Hz) fixed


The display has to display 1920x1080 Dot by Dot (Full pixel).

Other display except above can not display 3-dimension picture correctly.

It is not compatible with HDMI multiplex audio

It is not compatible with HDCP

## 2. Name of each part

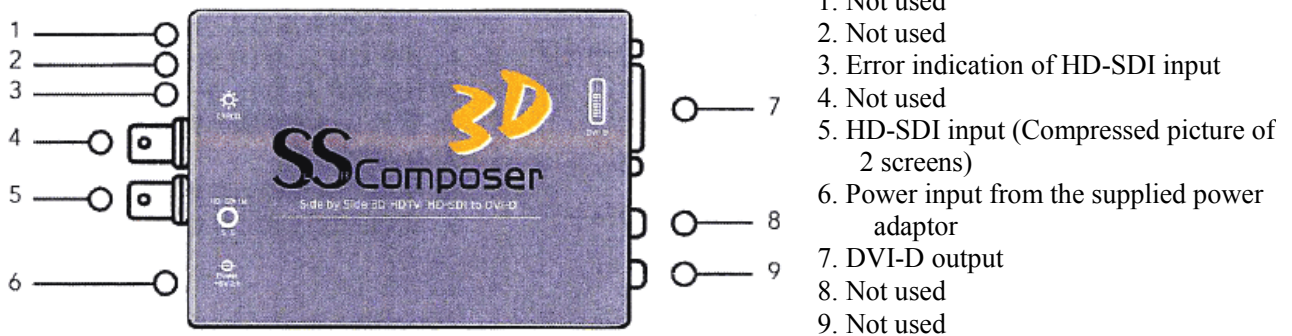

\* First line of video signal of X-pol display is equivalent to R channel.

\* This equipment generates heat during the operation but it is not abnormal.

Company names and product names which is written above are each company's brands or registered trademark. There are some case that measure or improvement that are published above catalog will be modified with no previous notice.